

E6 1/4" Plastic Bolted Pumps Specifications and Performance

SPECIFICATIONS


E6

FLOW RATE(Adjustable) 0-4 gpm (15 lpm)
PORT SIZEInlet and Outlet
 I.D.0.25" (6mm) NPTF I.D.
 O.D.0.50" (13mm) NPTM O.D.
AIR INLET..... 0.25" NPTF
SUCTION LIFT..... 5.83' Dry/25.5' Wet
 (1.78m/777m)
MAX. PARTICLE SIZE(Dia.)..... 0.3125" (1mm)
SHIPPING WEIGHTS
 Acetal 5.00 lbs (2.27 kg)
 Polypropylene 3.38 lbs (1.53 kg)
 PVDF 4.13 lbs (1.87 kg)



PERFORMANCE Determined by actual flow meter tests.

E6

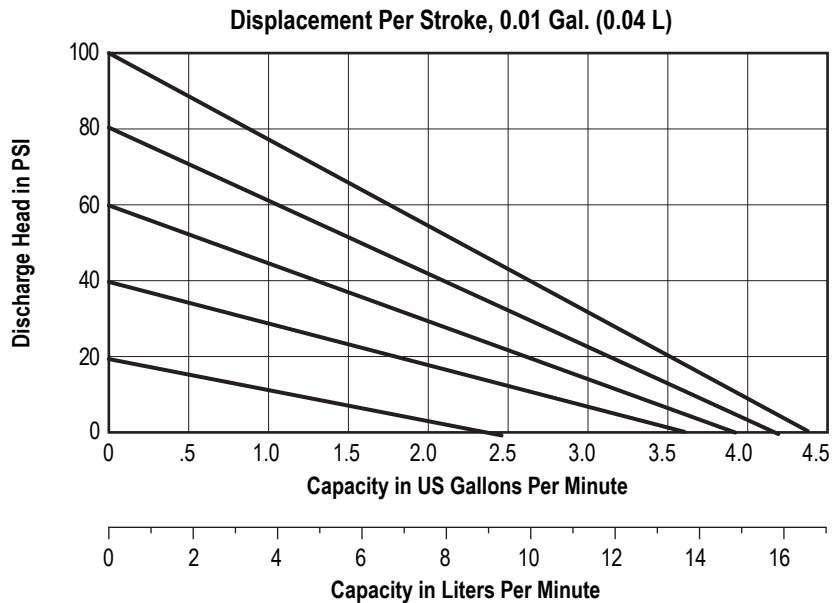

CAUTION: Do not exceed 100 psig (6.9 bars) air supply or liquid pressure.

CAUTION: Plastic pumps and components are not UV stabilized. Ultraviolet radiation can damage these parts and negatively affect material properties. Do not expose to UV light for extended periods of time.

DIMENSIONS Consult factory for certified drawings.

E6

